



PK626BA

N-Channel Enhancement Mode MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
30V	1.9mΩ @ $V_{GS} = 10V$	150A



PDFN 5X6P

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ C$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS	SYMBOL	LIMITS	UNITS
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ³	I_D	150	A
$T_C = 100^\circ C$	I_D	95	
Pulsed Drain Current ¹	I_{DM}	280	
Continuous Drain Current	I_D	27	
$T_A = 70^\circ C$	I_D	21	
Avalanche Current	I_{AS}	56.6	
Avalanche Energy	E_{AS}	160	mJ
Power Dissipation	P_D	73	W
$T_C = 100^\circ C$	P_D	29	
Power Dissipation	P_D	2.5	W
$T_A = 70^\circ C$	P_D	1.6	
Operating Junction & Storage Temperature Range	T_J, T_{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Ambient ²	$R_{\theta JA}$		50	°C / W
Junction-to-Case	$R_{\theta JC}$		1.7	

¹Pulse width limited by maximum junction temperature.

²The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz.Copper, in a still air environment with $T_A = 25^\circ C$.

³Package limitation current is 35A.

PK626BA

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	30			V
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250\mu\text{A}$	1.3	1.75	2.35	
Gate-Body Leakage	I_{GSS}	$V_{\text{DS}} = 0\text{V}, V_{\text{GS}} = \pm 20\text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 24\text{V}, V_{\text{GS}} = 0\text{V}$			1	μA
		$V_{\text{DS}} = 20\text{V}, V_{\text{GS}} = 0\text{V}, T_J = 55^\circ\text{C}$			10	
Drain-Source On-State Resistance ¹	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}} = 4.5\text{V}, I_D = 16\text{A}$		1.8	3.5	$\text{m}\Omega$
		$V_{\text{GS}} = 10\text{V}, I_D = 20\text{A}$		1.4	1.9	
Forward Transconductance ¹	g_{fs}	$V_{\text{DS}} = 5\text{V}, I_D = 20\text{A}$		80		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 15\text{V}, f = 1\text{MHz}$		3920		pF
Output Capacitance	C_{oss}			584		
Reverse Transfer Capacitance	C_{rss}			436		
Gate Resistance	R_g	$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 0\text{V}, f = 1\text{MHz}$		1.2		Ω
Total Gate Charge ²	Q_g	$V_{\text{GS}} = 10\text{V}$		77		nC
		$V_{\text{GS}} = 4.5\text{V}$		40		
Gate-Source Charge ²	Q_{gs}	$V_{\text{DS}} = 15\text{V}, V_{\text{GS}} = 10\text{V}, I_D = 20\text{A}$		12		nC
Gate-Drain Charge ²	Q_{gd}			18		
Turn-On Delay Time ²	$t_{\text{d}(\text{on})}$			31		
Rise Time ²	t_r			18		
Turn-Off Delay Time ²	$t_{\text{d}(\text{off})}$	$V_{\text{DS}} = 15\text{V}, I_D \geq 20\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 6\Omega$		60		nS
Fall Time ²	t_f			13		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25^\circ\text{C}$)						
Continuous Current ³	I_S				73	A
Forward Voltage ¹	V_{SD}	$I_F = 20\text{A}, V_{\text{GS}} = 0\text{V}$			1	V
Reverse Recovery Time	t_{rr}	$I_F = 20\text{A}, dI_F/dt = 100\text{A} / \mu\text{s}$		29		nS
Reverse Recovery Charge	Q_{rr}			13		nC







¹Pulse test : Pulse Width $\leq 300\ \mu\text{sec}$, Duty Cycle $\leq 2\%$.

²Independent of operating temperature.

³Package limitation current is 35A.




PK626BA

N-Channel Enhancement Mode MOSFET

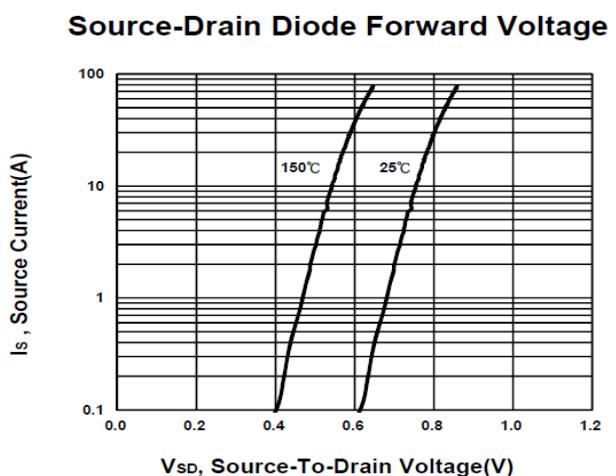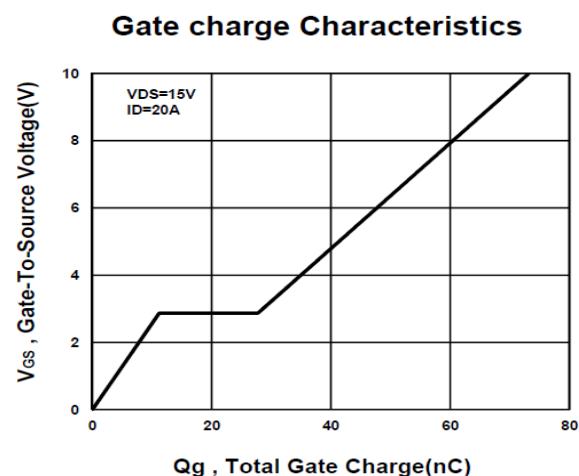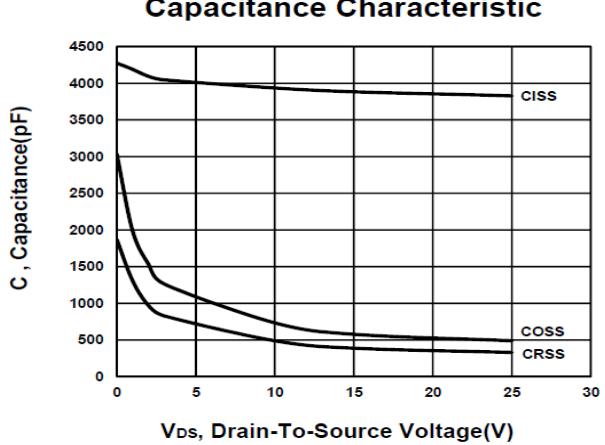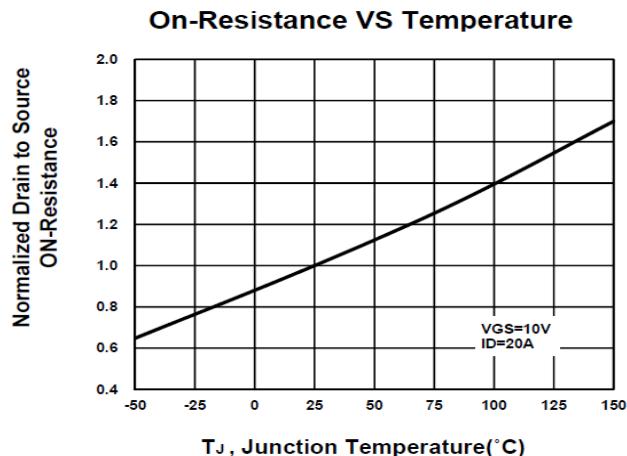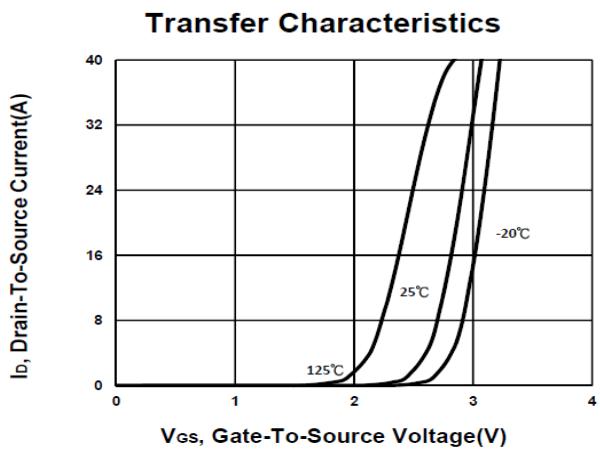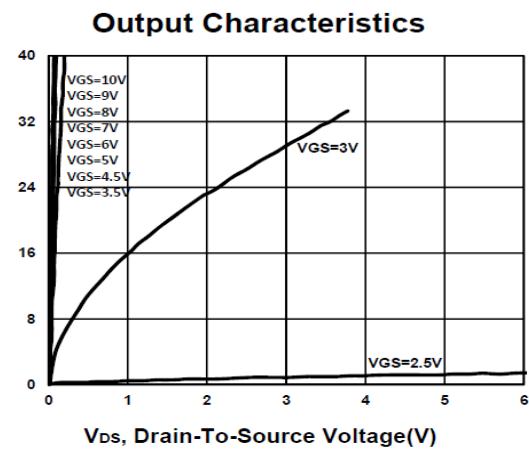

PK626BA

N-Channel Enhancement Mode MOSFET

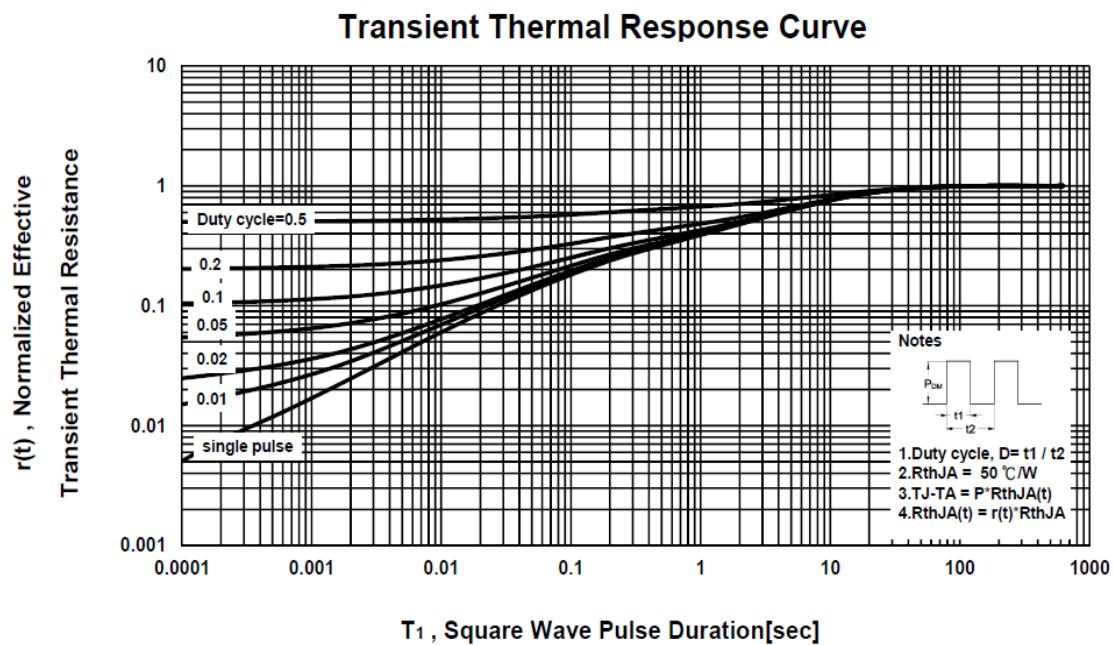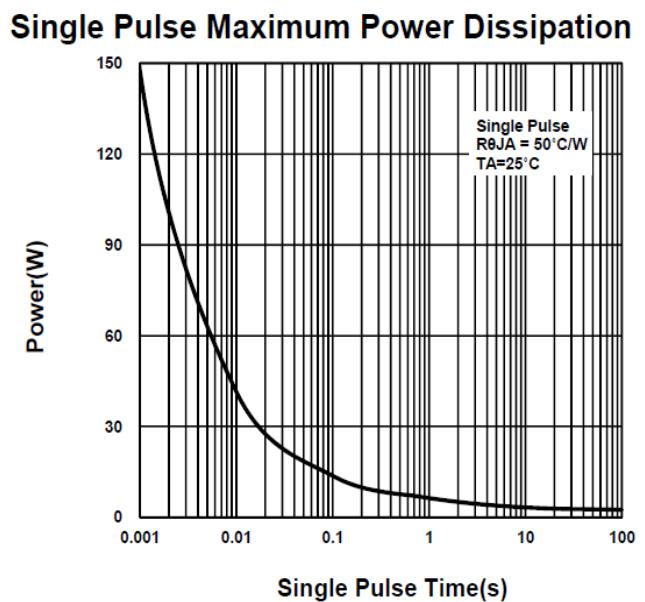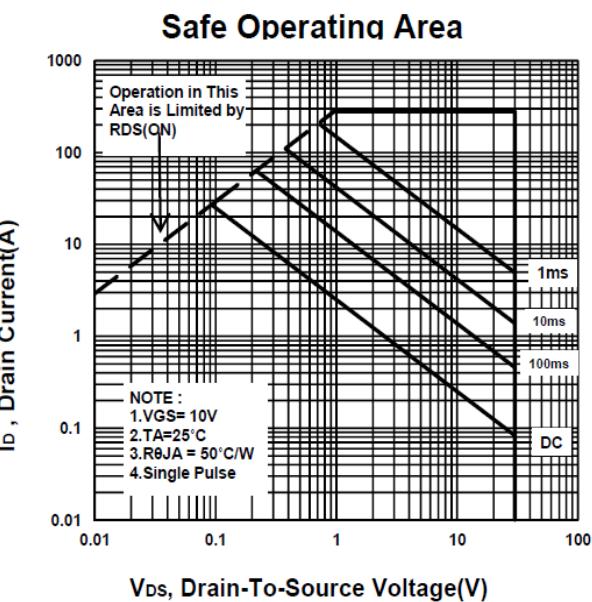


PK626BA

N-Channel Enhancement Mode MOSFET

Package Dimension

PDFN 5x6P MECHANICAL DATA


Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	4.8		5.15	J	3.34		3.9
B	5.42		5.9	K	0.9		
C	5.9		6.35	L	0.38		0.711
D	0.3		0.51	M	0°		12°
E	1.17	1.27	1.37	N	4.8		5.4
F	0.8	1	1.2	O	0.05		0.36
G	0.15		0.35	P	0.05		0.25
H	3.67		4.31	S	3.73		4.19
I	0.38		0.71				

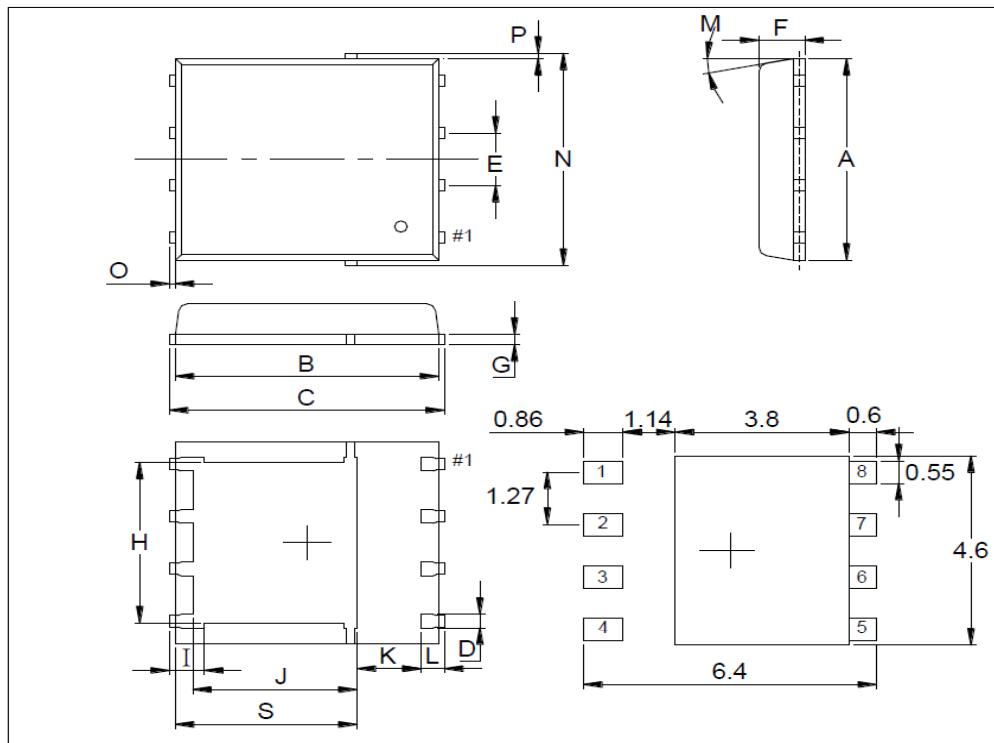


PK626BA

N-Channel Enhancement Mode MOSFET

A. Marking Information

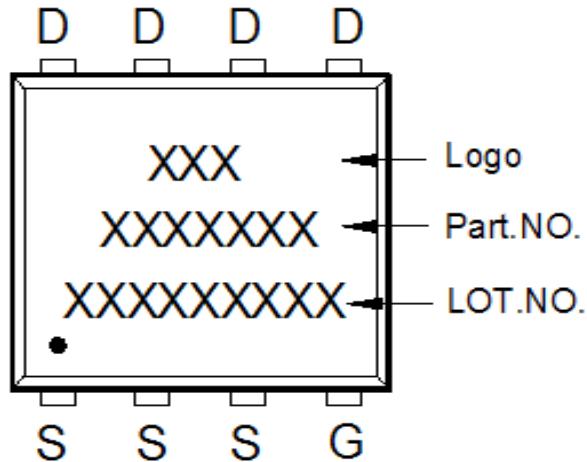

B. Tape&Reel Information: 3000pcs/Reel

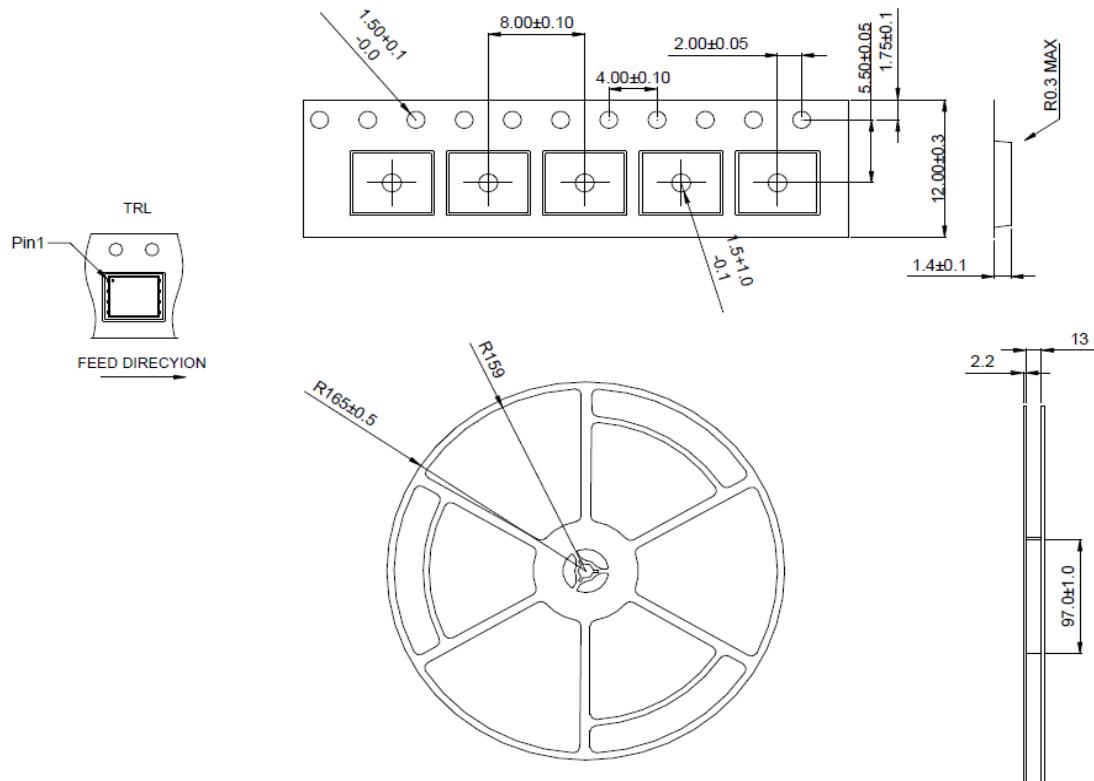


PK626BA


N-Channel Enhancement Mode MOSFET

C. Lot No.&Date Code rule

1. Lot No.

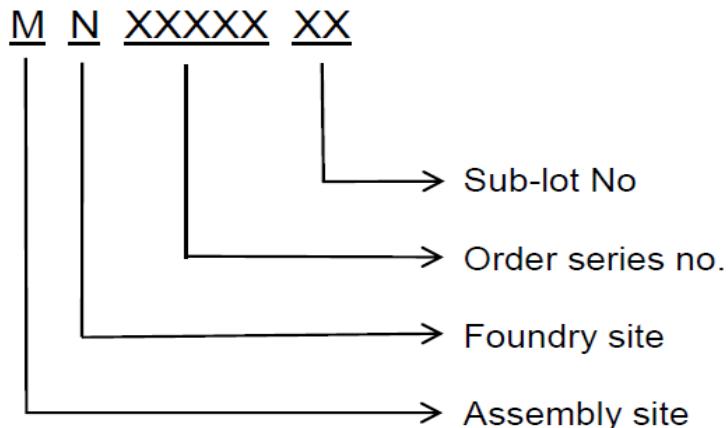

2. Date Code

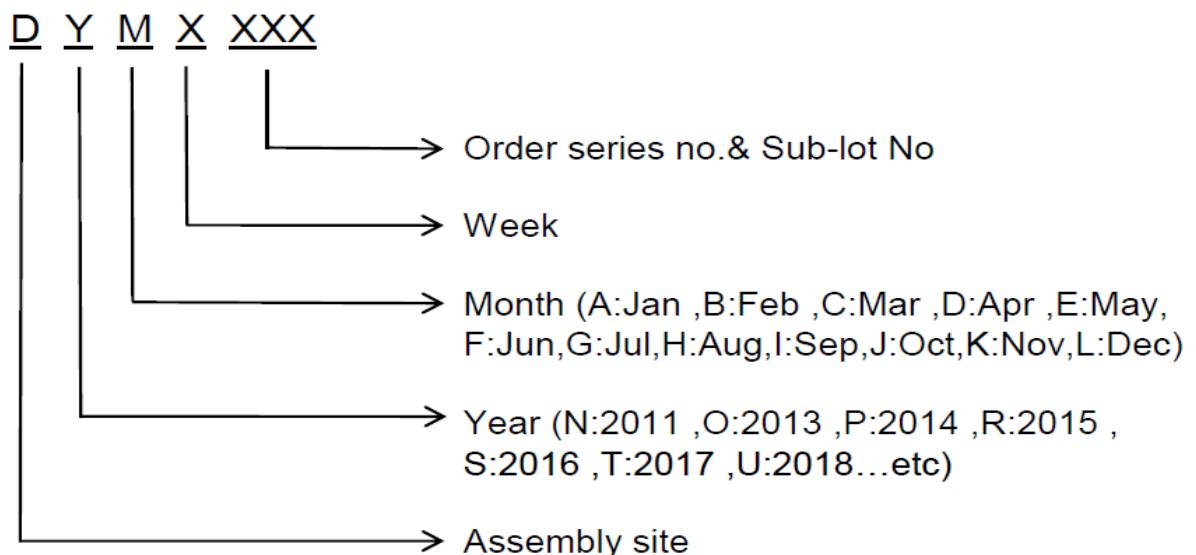

PK626BA

N-Channel Enhancement Mode MOSFET

D.Label rule

标签内容(Label content)



1	Label Size	30 * 90 mm	
2	Font style	Times New Roman or Arial (或可区分英文“0”和数字“0”，“G”和“Q”的字型即可)	
3	U-NIKC	Height: 4 mm	
4	Package	Height: 2 mm	
5	Date	Height: 2 mm Shipping date: YYYY/MM/DD, ex. 2008/09/12	
6	Device	Height: 3 mm (Max: 16 Digit)	
7	Lot	Height: 3 mm (Max: 9 Digit) Sub lot	
8	D/C	Height: 3 mm (Max: 7 Digit)	
9	QTY	Height: 3 mm (Max: 6 Digit) Thousand mark is no needed	
10	RoHS label	 long axis: 12 mm minor axis: 6 mm bottom color: White Font color: Black Font style: Arial	
11	Halogen Free label	 Diameter: 10 mm bottom color: Green Font color: Black Font style: Arial	
12	Scan information	Device / Lot / D/C / QTY , Insert “ / “ between every parts. for example: P3055LDG/G12345601/GGG2301/2000 DPI (Dots per inch): Over 300 dpi Code : Code 128 Height: 6 mm at least	